


# SP200RG Rotating Popup Speaker Cutout Template




Overall diameter with trim ring  
5.850" (150mm)

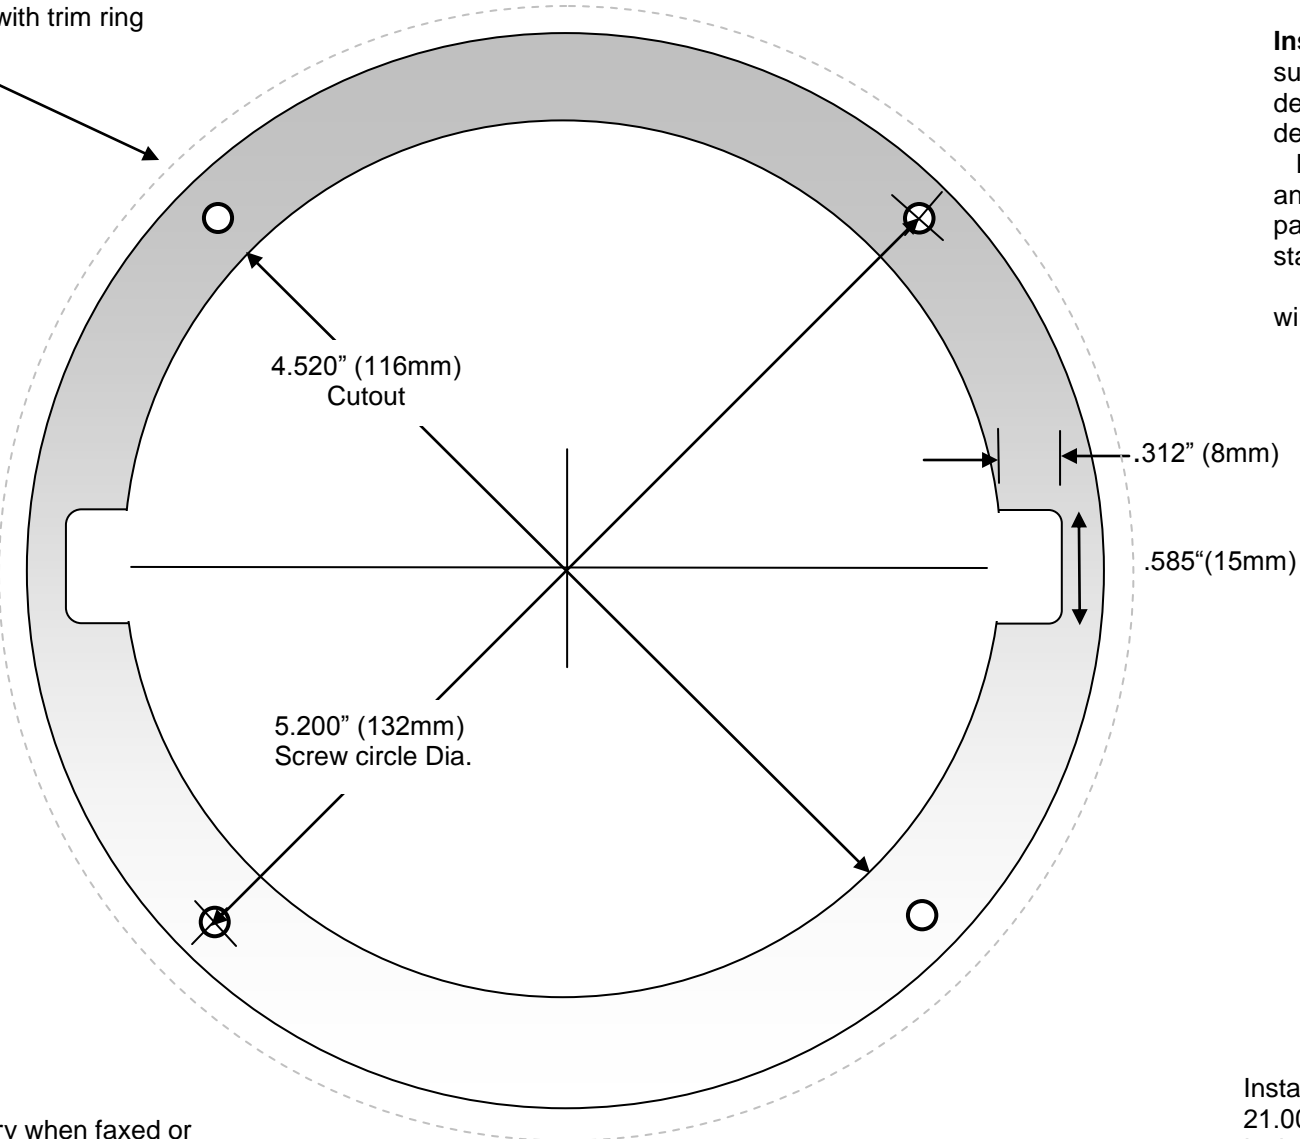

**Installation:** Find a suitable location making sure there is clearance for the installed depth. Use a hole saw or other suitable device to make a cutout.

Place the speaker in the cutout and mark and drill holes for the mounting screws. If the panel is too thin or soft for screws use a stainless screw clips.

Attach speaker wires supplied, solid color wire to positive.

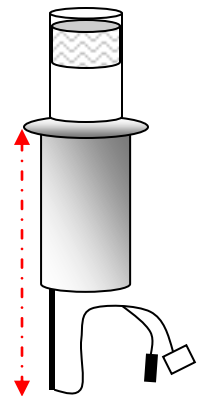

**Scale 1:1**  
Accuracy may vary when faxed or otherwise duplicated

Installed depth from Flange  
21.000" (533mm)  
Includes 1" (25mm) clearance for wires